



126
l/min

333
USGPM




15
bar

218
P.S.I.

POLY 2136

- 62.6100.97.3 - VS
- 62.6102.97.3 - VDA
- 62.6103.97.3 - VD
- 62.6105.97.3 - VA
- 62.6115.97.3 - VC

Pompa a 3 membrane-pistone semidrauliche.
Pompe à 3 piston-membranes semi-hydrauliques.
Bomba de 3 membranas-pistón semi-hidráulicas

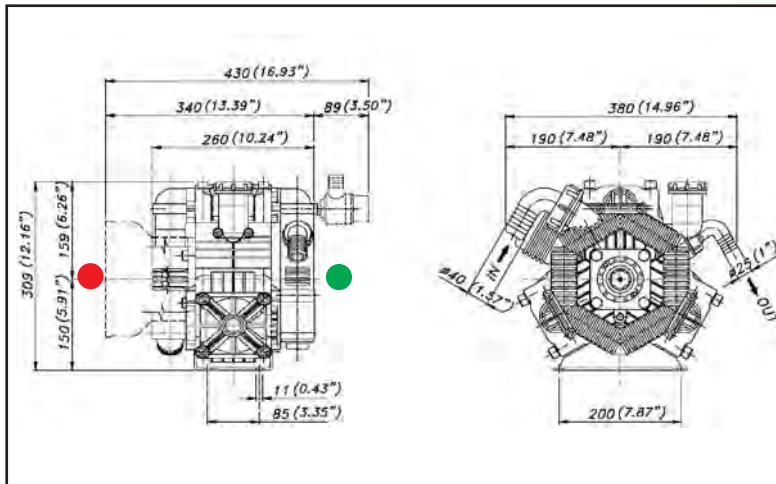

Optional Option *Opcional*

Caratteristiche tecniche Caractéristiques techniques Características técnicas			Mod. POLY 2136		
g/min; t/min; rev./min.	g/min	R.P.M.	550	550	
Potenza - Puissance - Potencia	KW	HP	3,6	4,8	
Peso - Poids - Peso	kg	lb	19	41,8	
Dislivello aspirazione Pression négative Presión negativa	MAX	M	ft	1,5	4,9
		Servizio discontinuo Emploi discontinu Servicio discontinuo	mt	ft	3
Ø Aspirazione - Aspiration - Aspiración		mm	in	40	1"9/16
Ø Mandata - Refoulement - Presión		mm	in	25	1"
Max. Temperatura - Température - Temperatura	°C	°F	60	140	
Tipo olio - Type huile - Tipo aceite	SAE	W	30	30	
Capacità olio - Capacité huile - Capacidad aceite	lt	U.S.G.	1	0,26	


TABELLA RENDIMENTI - TABLEAU DES PERFORMANCES TABLA DE RENDIMIENTOS

POLY 2136		g./min. - t/min. - rev./min.							
		400		450		500		550	
BAR	P.S.I.	L/min. USGPM	Kw HP	L/min. USGPM	Kw HP	L/min. USGPM	Kw HP	L/min. USGPM	Kw HP
2	29	92	0,4	103	0,4	115	0,4	126	0,5
		24,2	0,5	27,2	0,5	30,3	0,6	33,3	0,7
5	72,5	91	0,9	102	1,0	114	1,1	125	1,2
		24,0	1,2	27,0	1,3	30,0	1,5	33,0	1,6
10	145	90	1,8	101	2,0	113	2,2	124	2,4
		23,8	2,4	26,8	2,7	29,8	3,0	32,8	3,3
15	218	89	2,6	100	2,9	111	3,3	122	3,6
		23,4	3,5	26,4	3,9	29,3	4,4	32,2	4,8


ALBERO POMPA - ARBRE POMPE - CIGÜEÑAL BOMBA



ANT. - AVANT - ANTERIOR




ANT. - AVANT - ANTERIOR




POST. - ARRIÈRE
POSTERIOR




POST. - ARRIÈRE
POSTERIOR




POST. - ARRIÈRE
POSTERIOR




VS-VD-VDA-VC




VA



VD



VDA



VC